

# Components

## Water sensing cable




Model	: LBSC-1000 Ex
Protection Type	: Ex i IIC T4 Ga
Ambient Temp	: $-20^{\circ}\text{C} \leq T_a \leq +60^{\circ}\text{C}$
Cable diameter	: approx. 6 mm
Continuity wire	: AWG 20 x 2
Sensing wire	: AWG 30 x 2
Spacer	: XLEVA
Outer covering	: Flame retardant nylon fibre
Color	: Black with red stripe

## Multi-purpose sensing cable



Model	: LBSC-7000 Ex
Protection Type	: Ex i IIC T4 Ga
Ambient Temp	: $-20^{\circ}\text{C} \leq T_a \leq +60^{\circ}\text{C}$
Cable diameter	: approx. 6 mm
Continuity wire	: AWG 20 x 2
Sensing wire	: AWG 30 x 2
Spacer	: XLEVA
Outer covering	: Flame retardant nylon fibre
Color	: Black with blue stripe


## Safety barrier kit

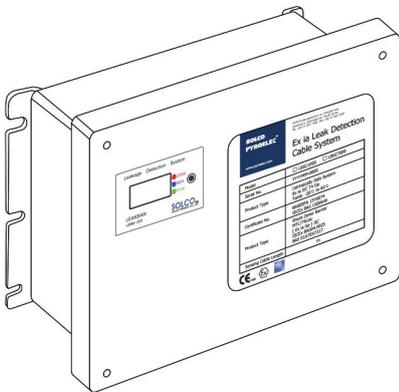

<b>Model</b>	: LBZK
<b>Component</b>	: ① LBSM-200 Submodule ② SMPS 12V ③ Safety barrier* X 2 ④ Weather-proof enclosure IP66

\* Please refer to sales representative for more information on Ex certified safety barrier.

## Insulative fixing clip

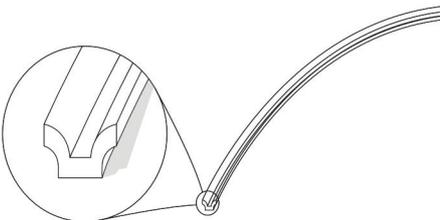

<b>Model</b>	: LBIG
<b>Material</b>	: Flame retardant PVC
<b>Dimension</b>	: 15mm X 20mm